Carpentry drawing: floor layout and cut list

Day 23 • 2026-12-07 • 12:45 PM–2:00 PM


15 questions. Show your method and include units. For multiple choice, enter A, B, C or D. Follow your instructor’s calculator guidance.

Name _____ **Date** _____

Type into the fields and save a copy, or print and write.

READ THE PLAN

01 What is the perimeter of the 7.2 m by 3.6 m floor shown?

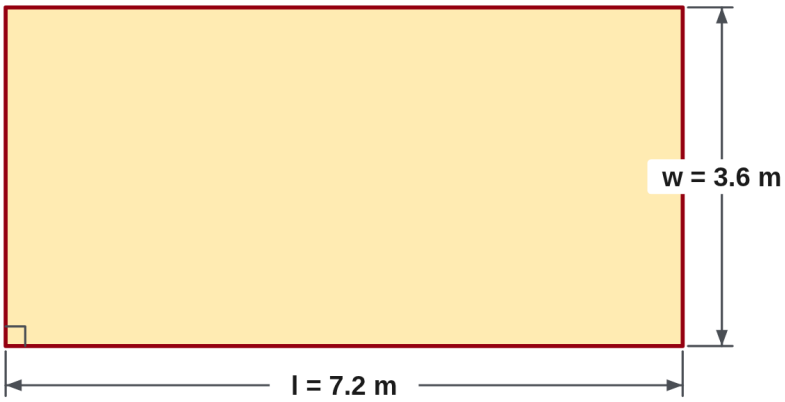

Shape Canvas


Answer (m) _____ **Working / reason** _____

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

Carpentry drawing: floor layout and cut list

Day 23 • 2026-12-07 • 15 questions

02 What is the area of the 7.2 m by 3.6 m floor shown?

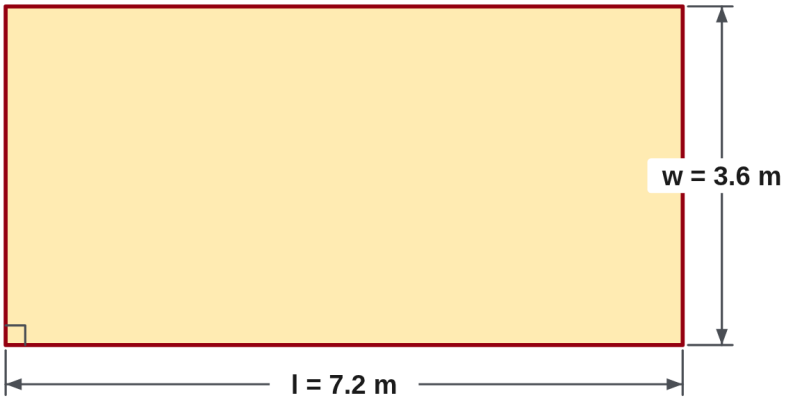

Shape Canvas

Answer (m²)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

Carpentry drawing: floor layout and cut list

Day 23 • 2026-12-07 • 15 questions


03 The Numeracy Hub area/perimeter diagram is open. Which quantity is needed for flooring coverage?

A. Diagonal length

B. Angle total

C. Area

D. Perimeter

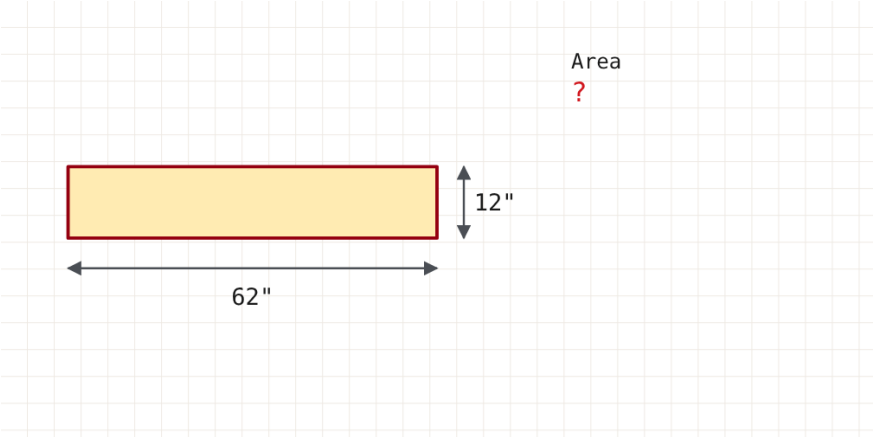

Numeracy Hub

Choice (A–D)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

04 A separate stock sketch shows a length of 4500 mm. Should this be combined directly with a floor area of 25.92 m²?

A. Only if the calculator is cleared

B. No; they are different quantities and contexts

C. Yes; add them to find a total

D. Yes; multiply both by 100

Choice (A–D)


Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

Carpentry drawing: floor layout and cut list

Day 23 • 2026-12-07 • 15 questions

05 Convert the 7.2 m floor length shown into millimetres.

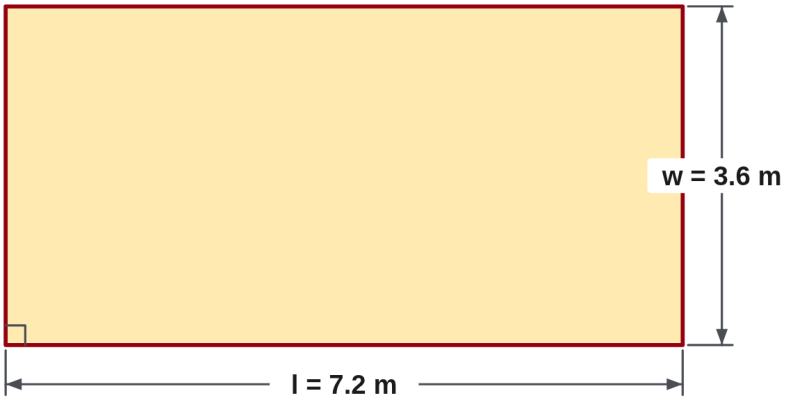

Shape Canvas

Answer (mm)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

CALCULATE THE LIST

06 Four pieces are each 900 mm long. Find their combined finished length before kerf.

Answer (mm)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

07 Four cuts each remove 3 mm of kerf. What total length is lost to kerf?

Answer (mm)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

Carpentry drawing: floor layout and cut list

Day 23 • 2026-12-07 • 15 questions

08 From 4500 mm stock, cut four 900 mm pieces using four cuts of 3 mm kerf. What offcut remains?

Answer (mm)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245


09 A cut list needs two 1250 mm pieces and three 600 mm pieces. Find the total finished length.

Answer (mm)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

10 Find the diagonal of the 7.2 m by 3.6 m floor. Round to 2 decimal places.

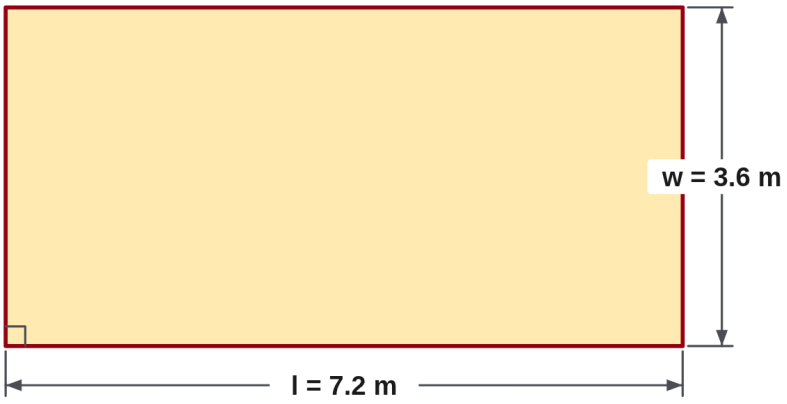

Shape Canvas

Answer (m)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

Carpentry drawing: floor layout and cut list

Day 23 • 2026-12-07 • 15 questions

CHECK ASSUMPTIONS

11 A learner subtracts four pieces from stock but omits four stated kerfs. What happens to the reported offcut?

A. It is too large by the total kerf

B. It is too small by the total kerf

C. It is unchanged

D. It becomes an area

Choice (A–D)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

12 Why must the number of cuts be stated rather than guessed from the number of pieces?

A. Every job always has exactly one cut

B. Kerf never matters

C. The number of cuts depends only on the unit

D. The cutting sequence and usable end can change the count

Choice (A–D)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

13 Four 3 mm kerfs were omitted from an offcut calculation. By how many millimetres must the reported offcut be reduced?

Answer (mm)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

Carpentry drawing: floor layout and cut list

Day 23 • 2026-12-07 • 15 questions

14 Which check best catches a cut-list addition error?

A. Change millimetres to degrees

B. Add finished lengths, total kerf and offcut back to the original stock length

C. Add only the number of pieces

D. Compare the answer with the floor area

Choice (A–D)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245

15 A stock balance has 3600 mm of finished pieces, 12 mm kerf and 888 mm offcut. What original stock length does this verify?

Answer (mm)

Working / reason

Textbook Chapter 3 pp.68–75; Chapter 9 pp.220–221; Chapter 10 pp.242–245